



What information is required to specify the correct Jost axle?

In order for Jost to supply the correct axle for your trailer we need to know the following:

1. Track length? Measure the distance from outside drum to outside drum as shown here, Jost standard length for hollow round axles are 1910mm, and for solid square axles are 1830mm. Other lengths can be supplied as required.

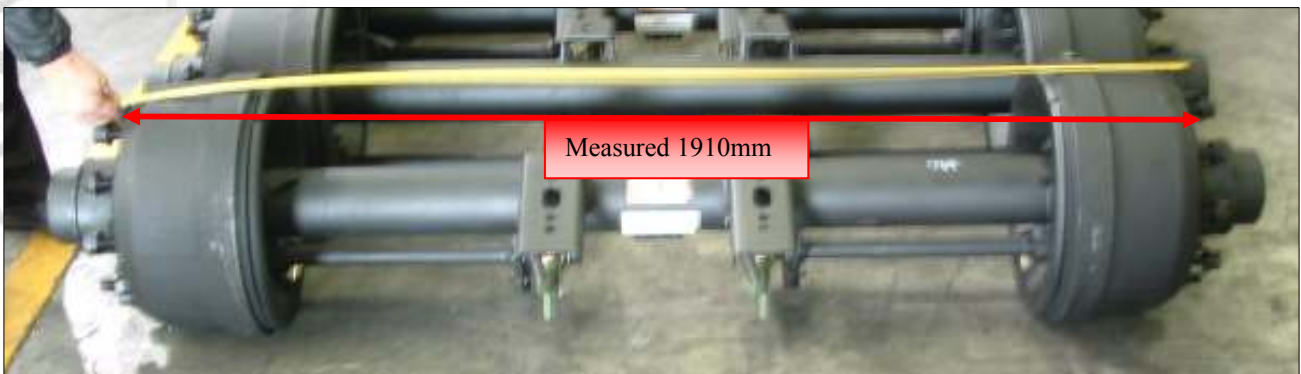

2. ABS or non ABS? Only one axle in an axle group needs to have ABS fitted. As legislated 14 February 2004.

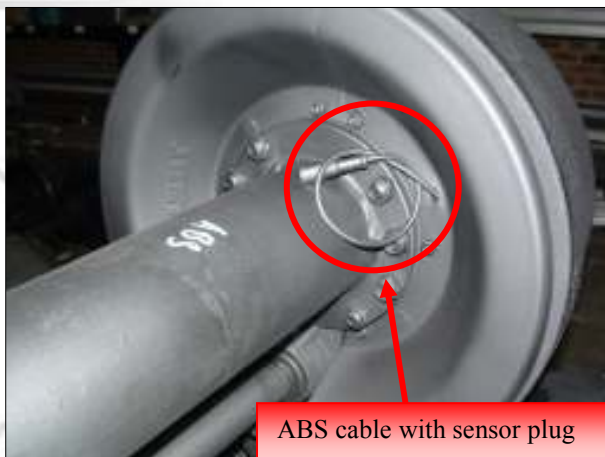

3. Auto slack adjuster or Manual slack adjuster?

If your trailer was manufactured after 14 February 2004, by law your trailer axles must have Automatic Slack Adjusters fitted as shown on these JOST axles.



Automatic Slack Adjuster



4. Do you require a 127mm round axle or a 105mm Square axle?



127mm Jost hollow round axle



105mm Jost Solid square axle

5. The Jost self-torque axle nut.



Jost self-torque axle nut

You may consider specifying the Jost self-torque nut with your Jost axle for added peace of mind. The nut torques itself to the correct setting ensuring better tyre wear, increased bearing and seal life, and less time in the workshop.



Jost standard axle nut

Yet another reason to specify **Jost** products!

For more bulletins, please visit our website: www.jost.co.za
 For more information or assistance contact Christo de Clerk at: christo@jost.co.za or 082 774 9818